



THE HEAVY-DUTY RANGE

Powerful and rugged tyre-changing solutions for truck, bus, agricultural vehicle and earthmover wheels



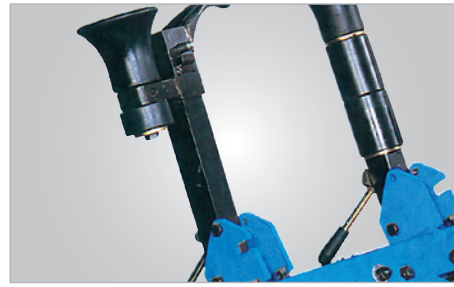


Accurate and gentle

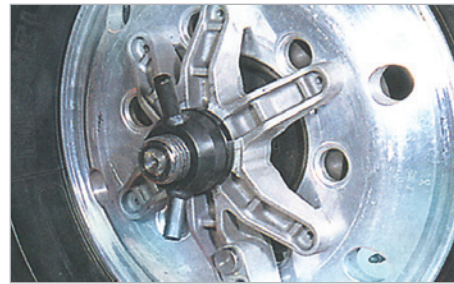

Adaptor assembly (220 – 280 mm Ø)



The mounting clamp, a strong aid

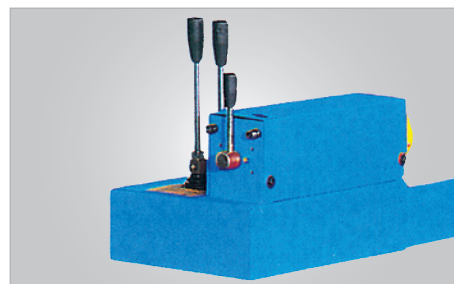

Control console




MONTY® 3650

- monty® 3650 – The compact tyre changer for rims of 16 – 24.5“: ideal for forwarding agencies, municipal truck fleets and mobile service trucks for mounting and demounting of tubeless truck and light-truck tyres
- Access ramp for easy loading of the tyre changer
- Two rollers for bead breaking and tyre changing speed up operation. Both the inner and outer beads are demounted in a single process without need for readjustment of the mounting tool
- Demounting tool included in standard equipment
- The roller reduces the cycle time with new tyres
- The tool allows gentle handling of retreaded tyres
- Easy control with integrated control unit
- Clamping of wheel through the centre hole with cone/adaptor assembly
- Special adaptor backplate prevents slipping of wheel



MONTY® 3850

- monty® 3850 – The compact tyre changer for rims of 13 – 26“: ideal for tyre shops for mounting and demounting of tubed and tubeless truck and bus tyres on drop-centre and split-ring rims
- Electro-hydraulic drive
- Mobile control unit
- Positioning of wheel and tool within a wide accurate adjustment range
- Infinitely self-centring universal hydraulic chuck
- Bead breaker disc and mounting/ demounting tool fitted on swing arm
- A non-return valve prevents accidental unclamping of wheels

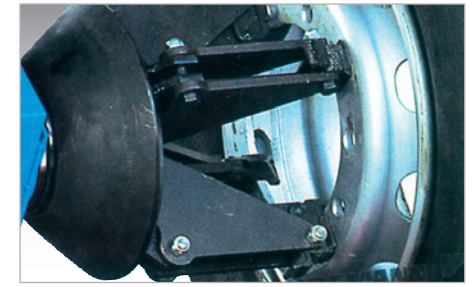

Chuck

The chuck is of solid design to accommodate wheels of up to 1000 kg. A non-return valve prevents the chuck from opening in case of a sudden hydraulic pressure drop.




Bead breaker

The bead breaker disc is equipped with a special tilting system in order to increase bead breaking effort and to make sure the bead breaking disc is always in optimum position relative to the rim.



The mounting clamp, a strong aid

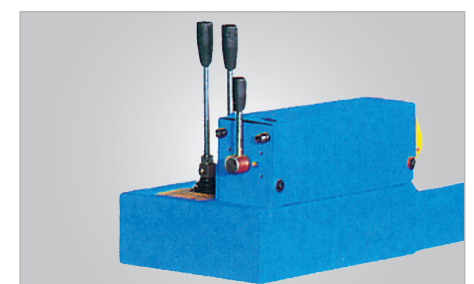

Control console




MONTY® 4250



MONTY® 4400



MONTY® 5800BA

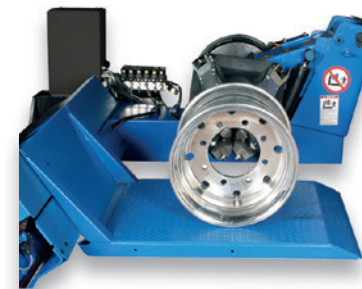

MONTY® 5800B



MONTY® 5800WL

MONTY® 4250

- monty® 4250 – The compact tyre changer with double reinforced frame for rims of 14 – 32“: ideal for tyre shops for mounting and demounting truck, bus, agricultural vehicle and earthmover tyres
- Rugged chuck design
- Mobile control unit with switch to control two operations simultaneously
- 2 Chuck speeds, preset via switch

ADDITIONAL FEATURES OF MONTY® 4250R

- monty® 4250 – The compact tyre changer with double reinforced frame and hydraulic control, for rims of 14 – 32“: ideal for tyre shops for mounting and demounting truck, bus, agricultural vehicle and earthmover tyres

- Hydraulically controlled tool holder and chuck arm
- Automatically rotating tool
- Mobile control unit fitted on swing arm

ADDITIONAL FEATURES OF MONTY® 4400

- monty® 4400 – The compact tyre changer with patented bead breaker disc, for rims of 14 – 44“: ideal for tyre shops for mounting and demounting truck, bus, agricultural vehicle and earthmover tyres
- Patented bead breaker disc for increased bead breaker effort

MONTY® 5800B

- monty® 5800B – The tyre changer for rims of 4 – 58“, for wheels up to 2000 kg, 1.5 m wheel width and 2.5 m wheel diameter: ideal for tyre shops for mounting and demounting heavy-duty truck and commercial vehicle tyres
- High bead breaking force of up to 3.8 t, even for tightly fitting tyre/wheel assemblies
- Lowering of chuck to 350 mm to facilitate accommodation of rims of small diameter
- Control console with switch for simultaneous control of two functions
- 2 Chuck speeds of 4 or 8 rpm to be preset by switch. Slow speed allows thorough monitoring of critical operations, whereas quick speed allows quick mounting/demounting in uncritical phases.
- Connecting cable between machine and control unit

ADDITIONAL FEATURES OF MONTY® 5800BA

- Control unit ergonomically fitted on swing arm, no disturbing cables

ADDITIONAL FEATURES OF MONTY® 5800WL

- Radio-controlled operation
- Automatic operation of mounting tool and preset tool carriage travel
- Automatic switching off extends the life of hydraulic motor and hydraulic oil and most of all saves energy.



Chuck

The chuck is of solid design to accommodate wheels of up to 1500 kg. A non-return valve prevents the chuck from opening in case of a sudden hydraulic pressure drop.




Bead breaker

The bead breaker disc is equipped with a special tilting system in order to increase bead breaking effort and to make sure the bead breaking disc is always in optimum position relative to the rim.



Extremely vast clamping range

Clamping range of 4” – 58” without extensions – long jaws accommodate rims of high offset

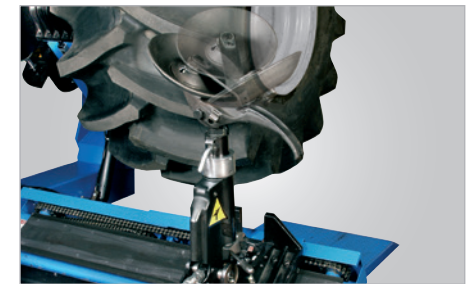


Mounting tool

The mounting tool is adjustable by 180 deg. irrespective of arm position.







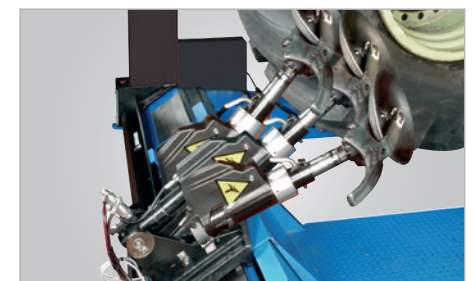





Special design

Adjustable studs ensure long life of the chuck arm hinge.






Hydraulically adjustable tool support

ACCESSORIES

	Part No.	Description	monty® 3650	monty® 3850	monty® 4250	monty® 4250R	monty® 4400	monty® 5800
	0001418	Short tyre lever	Standard	Option	Standard	Standard	Standard	Standard
	4004461	Long tyre lever	Option	Standard	Standard	Standard	Standard	Standard
	4023775	Adaptor 202 mm	Option					
	0023506	Adaptor 176 mm	Option					
	4021247	Cone (Ø 135 – 167 mm)	Option					
	4021100	Adaptor assembly (Ø 220 – 280 mm)	Standard					
	4020798	Star flange small (Ø 164 mm)	Option					
	4002354	Bead pushing lever			Standard	Standard	Standard	Standard
	4009472	Mounting clamp	Standard	Standard	Standard	Standard	Standard	Standard
	4021852	Clamp for light alloy rims	Option	Option	Option	Option	Option	Option
	4024501	Kit for split-ring rims	Option					

ACCESSORIES

	Part No.	Description	monty® 3650	monty® 3850	monty® 4250	monty® 4250R	monty® 4400	monty® 5800
	4007611	OTR clamp for split-ring rims		Option	Option	Option	Option	Option
	EAK-0315G66A	Jaw protection kit		Standard	Standard	Standard		
	4008264	Alloy rim adaptors 280 mm					Option	
	4008257	Alloy rim adaptors 220 – 280 mm					Option	
	4030013	Alloy rim adaptors						Option
	4022287	Tubeless roll		Option		Option	Option	
	4023741	Tubeless roll			Option			
	EAA0373G89A	Tubeless roll					Option	Option
	4024715	Extensions 32” – 56”			Option	Option		
	4019161	Extension 44” – 56”					Option	
	4021053	Ring nut 46 x 6	Standard					

THE HEAVY-DUTY RANGE



monty®

TRUCK TYRE CHANGERS

TECHNICAL SPECIFICATIONS

		monty® 3650	monty® 3850	monty® 4250
Rim clamping range	inch	16 – 22.5	14 – 26	14 – 32
Rim clamping range incl. extensions	inch			32 – 56
Max. wheel width	inch/mm	20 / 500	27.5 / 700	43 / 1100
Max. wheel diameter	inch/mm	47 / 1200	59 / 1500	92.5 / 2350
Max. wheel weight	kg	200	1000	1500
Bead braking force	kN	18	27	33
Chuck speed	UpM	4	7	4 / 8
Chuck motor power	kW	0.75	1.8	1.3 – 1.8
Hydraulic motor power	kW	0.75	1.5	1.5
Dimensions (W x D x H) approx.	mm	1270x1290x1100	1670x1400x840	2100x2100x1480
Weight	kg	330	540	761
Power supply		400 V 3ph 50 Hz		

		monty® 4250R	monty® 4400	monty® 5800
Rim clamping range	inch	14 – 32	14 – 44	4 – 58
Rim clamping range incl. extensions	inch	32 – 56	44 – 56	–
Max. wheel width	inch/mm	43 / 1100	43 / 1100	59 / 1500
Max. wheel diameter	inch/mm	92.5 / 2350	90.5 / 2300	98.5 / 2500
Max. wheel weight	kg	1500	1500	2000
Bead braking force	kN	33	33	38
Chuck speed	UpM	4 / 8	4 / 8	4 / 8
Chuck motor power	kW	1.3 – 1.8	1.5 – 2.2	2.2 – 3.0
Hydraulic motor power	kW	1.5	1.5	1.5
Dimensions (W x D x H) approx.	mm	2450x2100x1480	2660x1940x850	2990x2100x2025
Weight	kg	897	1032	1450
Power supply		400 V 3ph 50 Hz		

EMEA-JA
Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)
Phone: +39 0522 733-411 - Fax: +39 0522 733-479 - www.hofmann-equipment.com

Austria
Snap-on Equipment Austria GmbH - Hauptstrasse 24/Top 14 - A-2880 St. Corona/Wechsel (RE)
Phone: +43 1 865 97 84 - Fax: +43 1 865 97 84 29 - www.hofmann-equipment.com

France
Snap-on Equipment France - ZA du Vert Galant - 15, rue de la Guivernone BP 97175
Saint-Ouen-l'Aumône - 95056 Cergy-Pontoise CEDEX
Phone: +33 134 48 58-78 - Fax: +33 134 48 58-70 - www.hofmann-equipment.com

Germany
Snap-on Equipment GmbH - Konrad-Zuse-Straße 1 - 84579 Unterneukirchen
Phone: +49 8634 622-0 - Fax: +49 8634 5501 - www.hofmann-equipment.com

Italy
Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)
Phone: +39 0522 733-411 - Fax: +39 0522 733-410 - www.hofmann-equipment.com

United Kingdom
Snap-on Equipment Ltd. - Unit 17 Denney Road, King's Lynn - Norfolk PE30 4HG
Phone: +44 118 929-6811 - Fax: +44 118 966-4369 - www.hofmann-equipment.com